


SeaLine

CAT 7 (SHF2)

Cable type: 02YS CHX 4X2X0.6/1.43-100 PIMF

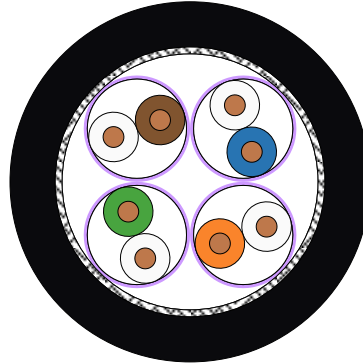

Design

Wire

Bare copper wire (23 AWG)
Insulation of foamed Polyethylene (PE) with skin

∅ 0.6 mm (0.024 in dia)
∅ 1.43 mm (0.056 in dia)

Screened pair

2 wires twisted to a pair
Alulaminare foil overlapped, applied longitudinally

Core

4 screened pairs
Sequence of colors: WH/BU-WH/OG-WH/GN-WH/BN
Shield braiding of tinned copper wires 0.1 mm dia (38 AWG)
Coverage about 65%

∅ 6.6 mm (0.260 in dia)

Jacket

Thermoplastic copolymer (FRNC) (cross-linked) BK

∅ (8.7 ±0.2) mm (0.343 ±0.008 in dia)

Printing: "sequential length in metres" * BizLink **SeaLine** SCG * L45467-J416-C96 * 02YSCHX 4X2X0.6/1.43-100 PIMF CAT7 IEC 60332-3-22 SHF2 * "internal lot number"

Electrical data at 20°C

Loop resistance	≤	140	Ohm/km
Insulation resistance	≥	500	MOhm*km
Signal run time	≤	5.3	ns/m
Capacitance (1 kHz)	≈	42	nF/km
Operating voltage (peak)	≤	100	V
Characteristic impedance 100 MHz	(100 ±5)		Ohm
Surface transfer impedance 10 MHz		10	mOhm/m
Test voltage (wire/wire/screen rms 50Hz 1min)		700	V

CONFIDENTIALITY: This document and its content must be treated strictly confidential and are property of BizLink Special Cables Germany GmbH

Frequency	1	4	10	16	20	31.25	62.5	100	155	200	300	600
Next (dB)	80	80	80	80	80	80	75.1	72.4	69.6	67.9	65.3	60.8
PSNext (dB)	77	77	77	77	77	77	72.5	69.4	66.6	64.9	62.3	57.8
ELFext (dB)	80	80	74.0	69.9	68	64.1	58.1	54	50.2	48	44.5	38.4
PSELFext (dB)	77	77	71	66.9	65	61.1	55.1	51	47.2	45.0	41.5	35.4
Attenuation (dB/100m)	2.0	3.6	5.7	7.2	8.1	10.1	14.5	18.5	23.4	26.8	33.3	48.9
Frequency	4	8	10	16	20	31.25	62.5	100	155	250	350	600
Return loss (dB)	23.1	24.5	25	25	25	23.6	21.5	20.1	18.8	17.3	17.3	17.3

Electrical requirements acc. to. EN 50288-4-1 & IEC 61156-5

Mechanical and thermal characteristics

Conductor material acc. to DIN EN 13602 Cu-ETP-A...

Screen material acc. to DIN EN 13602 Cu-ETP-A...-B

Insulating material acc. to DIN EN 50290-2-23 (VDE 0819), table 2/A (HD 624.3) (02Y)

Jacket material acc. to IEC 60092-360 (IEC 60092-359) SHF2

Oil resistant acc. to IEC 60811-404 (24 hours / 100°C)

Flame retardant acc. to IEC 60332-3-22 (Cat. A)

Flame retardant acc. to IEC 60332-1-2

Flame retardant acc. to IEC 60332-3-24 (Cat. C)

Approved for Marine and Offshore Applications

DNV - GL Certificate No. TAE000018F

Other characteristics

RoHS compliant (Directive 2011/65/EU & 2015/863/EU RoHS 3)

Low Smoke, Fire retardant, Zero Halogen

Corrosivity of fumes acc. to IEC 60754-2

Smoke-density acc. to IEC 61034

UV-resistant

Permissible temperature range

Transport, installation and operating: -40 °C (-40 °F) up to 80 °C (176 °F)

Min. bending radius allowed: repeated 10X \varnothing , single 5X \varnothing

Weight about : 81 kg/km (54,3 lb/1000ft)

Designation of order

L45467-J416-C96

228555

02YS CHX 4X2X0.6/1.43-100 PIMF

1000 m (3281 ft) on non-returnable reel

Product has not been tested and classified according to the CPR (EU/305/2011).

The product shall not be permanently installed in buildings in the EU.

FELTEN Wire and Cable Solutions BV reserves the right to make changes to the product described in this specification without prior notice. FELTEN does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.