


LEONI Part No.:
LEHC 004902 Rev.0


Construction

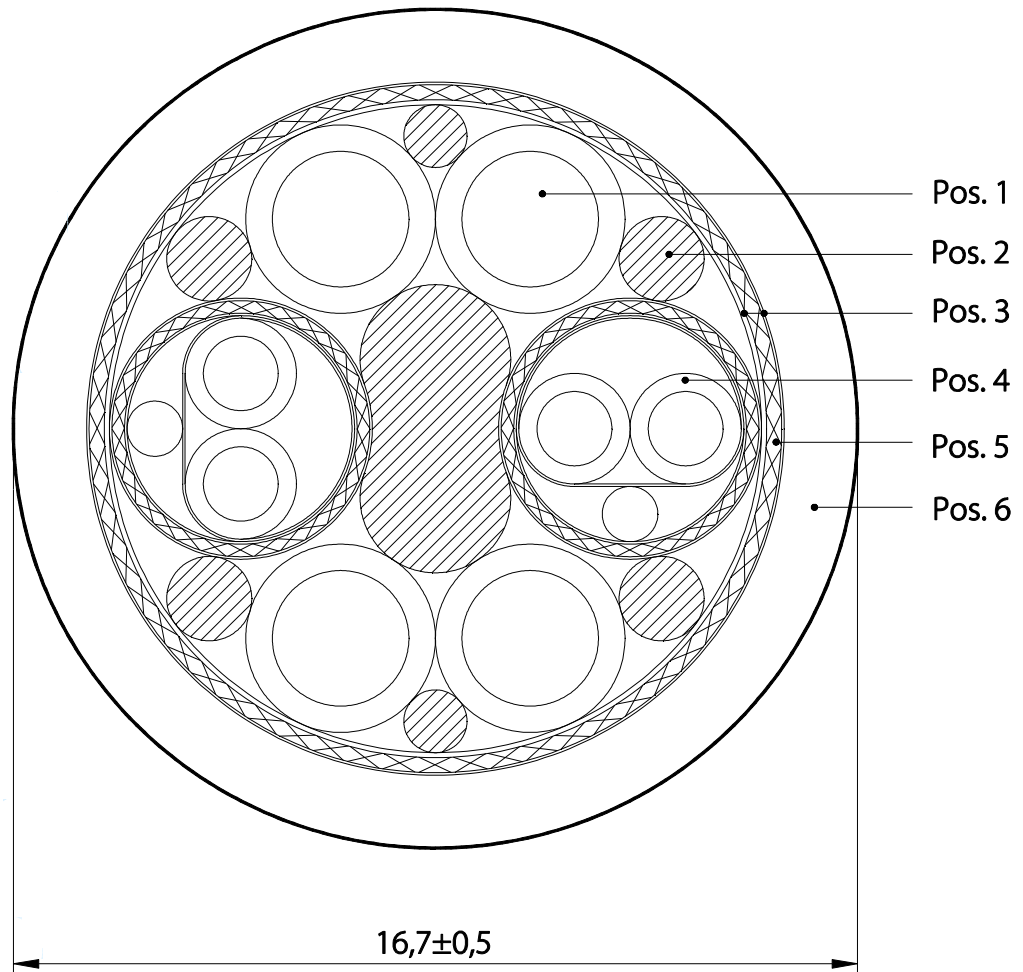

All indications on this data sheet have been made to the best of our knowledge. They are only a not binding advice and serve as a starting point for plannings. They don't release the user from own tests regarding the suitability of the desired application purposes. Processing and use of the products cannot be controlled by us and are therefore exclusively in your field of responsibility. Subject to alterations if new realization will make it necessary.

LEONI Part No.:
LEHC 004902 Rev.0

Cable description

Pos. 1	4 insulated wires 4,0 mm² conductor insulation colours	bare copper, single wire 0,15 mm in accordance to DIN EN 60228 cl. 6 / IEC 60228 cl. 6 PP black wires with white numbers 1-- 3, greenyellow
Pos. 2	filler	
Pos. 3	tapings	
Pos. 4	2 shielded pairs 2x1,5 mm² conductor insulation colours taping drainwire 0,5 mm ² 1. shielding 2. shielding taping	bare copper, single wire 0,15 mm in accordance to DIN EN 60228 cl. 6 / IEC 60228 cl. 6 PP black wires with white numbers 5 – 8 tin plated copper, single wire 0,15 mm both sides aluminized polyester tape braiding of tinned copper wires 0,128 mm optical covering min. 85 %
Pos. 5	shielding	braiding of tinned copper wires 0,15 mm optical covering min. 85 %
Pos. 6	outer jacket colour overprint in black with Inkjet XX YYYY outer diameter	Polyurethan in accordance to DIN VDE 0282 part 10 / HD22.10 S2 orange mat following RAL 2003 LEONI A FieldLink MC LEHC 004902 Rev.0 [4x4,0+2x(2x1,5)] XX/YYYY E47543  AWM STYLE 20234 I/II A/B 80°C 1000V FT-1 production week production year 16,7 ± 0,5 mm

All indications on this data sheet have been made to the best of our knowledge. They are only a not binding advice and serve as a starting point for plannings.
They don't release the user from own tests regarding the suitability of the desired application purposes.
Processing and use of the products cannot be controlled by us and are therefore exclusively in your field of responsibility.
Subject to alterations if new realization will make it necessary.

FELTEN Wire & Cable Solutions BV



Habraken 2401
5507 TM Veldhoven
The Netherlands

www.feltenwcs.com
email: sales@feltenwcs.com
Phone: +31(0)40-8200950

Number: LEHC 004902r0
Up-dating L: 01.07.2013
Up-dating F: 25.02.2021

LEONI Part No.:
LEHC 004902 Rev.0

Electrical properties

operating voltage	Pos. 1	U_0/U	0,6/1,0 kV
	Pos. 1 according 	max.	1000 V
	Pos. 4	max.	24 V
	Pos. 4 according 	max.	1000 V
test voltage	Pos. 1 conductor/conductor		4,0 kV 50Hz AC
	Pos. 1 conductor/shield		3,0 kV 50Hz AC
	Pos. 4 conductor/conductor		4,0 kV 50Hz AC
	Pos. 4 conductor/shield		3,0 kV 50Hz AC
conductor resistance	Pos. 1	max.	4,95 Ω /km at +20°C
	Pos. 4	max.	13,3 Ω /km at +20°C

Mechanical properties

bending radius for fixed installation	min.	6 x outside diameter
for drag chain installation	min.	12 x outside diameter*
acceleration	max.	5 m/s ²
traversing speed	max.	180 m/min
bendings in drag chains	min.	10.000.000
torque at a length of 1000 mm	max.	± 30 degree
horizontal length of the cable	max.	5 m
total weight	nom.	478 kg/km

Thermal properties

treatment and installation	-20°C bis +60°C
transport and stocking	-50°C bis +80°C
operating for fixed installation	-50°C bis +80°C
for drag chain installation	-20°C bis +60°C
short cut	max. +150°C (≤ 5 sec.)

All indications on this data sheet have been made to the best of our knowledge. They are only a not binding advice and serve as a starting point for plannings. They don't release the user from own tests regarding the suitability of the desired application purposes. Processing and use of the products cannot be controlled by us and are therefore exclusively in your field of responsibility. Subject to alterations if new realization will make it necessary.

LEONI Part No.:
LEHC 004902 Rev.0

Chemical properties

oil resistant in accordance to VDE 0282 part 10 / HD 22.10 S2 (test method to EN60811-2-1)
flame retardant in accordance to UL 1581 Vertical Wire Flame Test (VW-1)
flame retardant in accordance to CSA C22.2 Vertical Flame Test (FT-1)
flame retardant in accordance to IEC 60332-1-2
halogen free in accordance to IEC 60754-2
free of silicon and FCKW



the cable corresponds to EU – directive 2002/95/EG (RoHS)

Standard

UL Subject 758, Style 20234 and CSA - C22.2 No. 210



E 47543

Cable is approved to UL Style 20234 80°C 1000V VW-1 and cUL AWM I/II A/B 80°C 1000V FT-1

All indications on this data sheet have been made to the best of our knowledge. They are only a not binding advice and serve as a starting point for plannings.
They don't release the user from own tests regarding the suitability of the desired application purposes.
Processing and use of the products cannot be controlled by us and are therefore exclusively in your field of responsibility.
Subject to alterations if new realization will make it necessary.

FELTEN Wire & Cable Solutions BV

Habraken 2401
5507 TM Veldhoven
The Netherlands

www.feltenwcs.com
email: sales@feltenwcs.com
Phone: +31(0)40-8200950

Number: LEHC 004902r0
Up-dating L: 01.07.2013
Up-dating F: 25.02.2021